

DIMENSIONS / WEIGHT				DECORATION	
TOP DIAMETER (INNER)	253,2 mm (b)	Total capacity (to edge)	9600 ml	Dry offset	no
TOP DIAMETER (WITH FLANGE)	270 mm (a)	CONTAINER WEIGHT	245 g	IML	yes
BOTTOM DIAMETER (OUTSIDE)	228,1 mm (c)	HANDLE WEIGHT (PP)	9,5 g	IML partial	yes
HEIGHT	219 mm (h)	HANDLE WEIGHT (METAL)	-	Details included in the decoration templates.	
DIMENSIONS TOLERANCE	+/- 2 mm	WEIGHT TOLERANCE	+/- 5%		

LIDS:					
NAME:	P-10Bis/4 H	NAME:	P-10Bis/F H		
FOILING:	no	FOILING:	yes		
WEIGHT:	60 g	WEIGHT:	61,5 g		
IML	yes	IML	yes		
Offset:	no	Offset:	no		
Height with the lid	220 mm	Height with the lid	226 mm		
Capacity under the lid	9100 ml	Capacity under the lid	9600 ml		
WEIGHT TOLERANCE	+/- 5%	WEIGHT TOLERANCE	+/- 5%		
DIMENSIONS TOLERANCE	+/- 2 mm	DIMENSIONS TOLERANCE	+/- 2 mm		


## RAW MATERIAL / TRANSPORT AND WAREHOUSING

	TRANSPARENT PACKAGING	OTHER PACKAGING
Maximum batch weight	- kg	12.7 kg
Maximum load of the lower bucket	- kg	29.0 kg

The values indicated apply to ambient temperatures below 23°C.

### PALETIZATION

#### Arrangement on a 1200x800 mm pallet

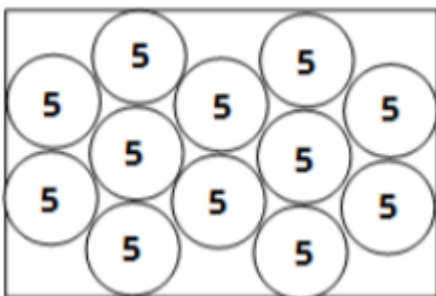

- The packaging requires storage and transport testing in the environment of its intended use.
- It is the responsibility of the customer to match the packaging with the target batch.
- This guarantee is valid 12 months from date of delivery. During this time, the package should be used. All packages from a single pallet should be used immediately after unpacking.
- The packaging is not intended for contact with food ingredients.
- The base material of the bucket is polypropylene, with an admixture of recycled materials up to a maximum content of 60%.
- The dyeing is not uniform – possible streaks and inclusions.
- Manufacturer is not responsible for container deformation because of stacking of single pallets or putting on them an extra load.

5 basic re-granulate colours



Palletization at delivery: 600, 660 pcs (packaging: hood or bag)